Botron B8775G Technical Data Sheet



Features:

StatCare Static Dissipative Floor paint is designed to dissipate static charges and stop static generation. It will provide a durable, UL approved, slip resistant finish and can be applied on sealed concrete. It's water-based epoxy/acrylate formula is extremely resistant to chemicals and solvents. Our ESD Floor Paint is superior to and will outlast latex and urethane floor paints.

PROPERTIES SPECIFICATIONS

Color: Grey, Light Grey, Beige

Solids: 32% +- 1%

Resistivity-ASTM D257: 108-9 Ohms2 Max/Cm2 @ 40%

Relative Humidity

Weight Per Gallon:

Hardness:

Viscosity:

Solvents:

Flash Point:

Dry Time:

8.1 – 8.35

30 / Sward

H-J / Gardner

Water-glycol

140 0 F minimum

Dry to touch 5-7 hours

Open for traffic: 10-12


Water Resistant: 8 hours - No effect Alcohol: 1 hour - No effect Gasoline: 8 hours - No effect Caustic 5%: 2 hours - No effect Soap Resistance: 8 hours - No effect

Slip Resistance: Exceeds UL Requirements
Coverage: 400 – 600 Ft. 2 /Gallon

Odor: Moderate (Glycol Ether, Alcohol)

Product Notes and Features

- Available in 3 colors
- Dry to touch in 5-7 hours
- Open for traffic in 10-12
- · Long lasting
- Water-based epoxy/acrylate
- Lead-free RoHS compliant

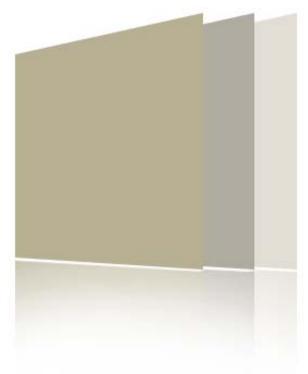

Botron Company Inc. | 325 W. Melinda Ln Phoenix AZ 85027 | Ph# 623-582-6700 | Fax# 623-582-6776

APPLICATIONS

Coverage is 400 – 600 Sq Ft per gallon 2 coats needed for maximum effectiveness 5 to 7 hours time between coats Complete curing with maximum durability and chemical resistance will take 5-7 days.

PART NUMBERS

B8771G Gray Floor paint 1 gallon B8775G Gray Floor paint 5 gallon

B8771LG Light Gray Floor paint 1 gallon B8775LG Light Gray Floor paint 5 gallon

B8771B Beige Floor paint 1 gallon B8775B Beige Floor paint 5 gallon

GROUNDING

Using heel grounders with this StatCare floor paint gives your staff the freedom to move around the work area performing an ESD function.