




Specification Sheet

Short Form Specifications

Eagle worktables, Spec-Master[®] series, model

Top to be constructed of 14/304 stainless steel with $1\frac{1}{2}$ " roll on front, $4\frac{1}{2}$ " backsplash, and sides turned down 90°. Undershelf to be adjustable and constructed of 18/304 stainless steel with marine edge. Top reinforced with stainless steel hat channels and sound deadened. Constructed with uni-lok [®] patented gusset system with the gussets recessed into the hat channels to reduce lateral movement. Legs to be 1 $\frac{5}{2}$ " O.D., stainless steel, grooved in 2" increments, with stainless steel gussets and 1" stainless steel adjustable bullet feet.

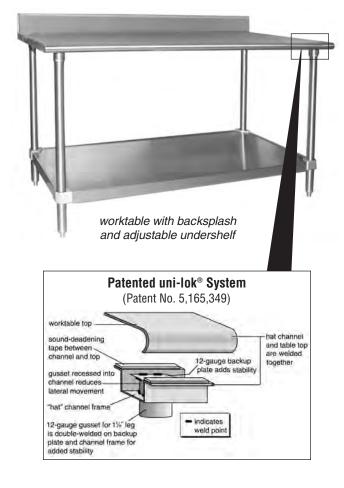

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.: _____ Project No.: _____ S.I.S. No.: _____

Worktables with Backsplash and Stainless Steel Base with Undershelf —Spec-Master® Series

MODELS:

🖵 T2424SE-BS	🖵 T24108SE-BS	□ <i>T3072SE-BS</i>	🗆 T3660SE-BS
🖵 T2430SE-BS	🖵 T24120SE-BS	□ <i>T3084SE-BS</i>	🗆 T3672SE-BS
🗆 T2436SE-BS	🗆 T24132SE-BS	<i>□T3096SE-BS</i>	🗆 T3684SE-BS
🗆 T2448SE-BS	🗆 T24144SE-BS	□ <i>T30108SE-BS</i>	🗆 T3696SE-BS
🗆 T2460SE-BS	🗆 T3030SE-BS	□ <i>T30120SE-BS</i>	🗆 T36108SE-BS
🗆 T2472SE-BS	🗆 T3036SE-BS	<i>□T30132SE-BS</i>	🗆 T36120SE-BS
🗆 T2484SE-BS	🗆 T3048SE-BS	<i>□T30144SE-BS</i>	🗆 T36132SE-BS
🖵 T2496SE-BS	🗆 T3060SE-BS	□ <i>T3648SE-BS</i>	🗆 T36144SE-BS

Tabletop

- Patented uni-lok[®] gusset system (patent #5,165,349): gussets are recessed into hat channel, reducing lateral movement.
- Top reinforced with welded-on hat channel.
- Sound-deadened between top and channels.
- $4\frac{1}{2}$ (114mm)-high 90° backsplash with 1" (25mm) turn at 90°.
- 1½" (38mm)-diameter 180° rolled edge on front. Ends are turned down 90°, providing for flush installations when required.
- 14 gauge type 304 polished stainless steel.

Adjustable Undershelf

- Easy assembly to legs: Snap split sleeves onto the grooved legs, and slide undershelf over the split sleeves, creating a positive lock between undershelf and legs.
- Heavy gauge stainless steel.
- Die-cast aluminum cast corners.
- Heavy duty marine edge design.

Legs—1%" (41mm)-diameter

- Tables 96" (2438mm) and longer come with six legs or more.
- Heavy gauge stainless steel.
- Grooved in 2" (51mm) increments.
- 1" (25mm) adjustable stainless steel feet.

Options / Accessories

- Drawer
- 🖵 Lock
- Casters
- Stainless steel bullet feet
- Overshelves



- Duplex receptaclesPot rack
- G Sink
- Additional undershelf
- Stabilizer Bar (for 30"-



EG10.45C Rev. 07/08


Spec sheets available for viewing, printing or downloading from our online literature librar y at www.eaglegrp.com

Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2008 by the Eagle Group



Item No.:	
Project No.:	
S.I.S. No.:	

Worktables with Backsplash and Stainless Steel Base with Undershelf—Spec-Master® Series

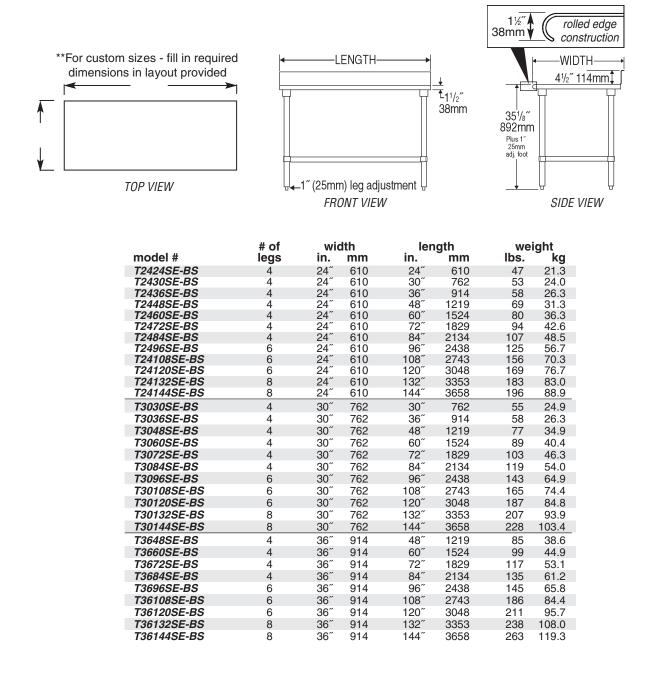

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2008 by Eagle Group **Rev. 07/08**

Spec sheets available for viewing, printing or downloading from our online literature librar y at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order .